

Stadi L-17/20 WS

DETAILS

Articlenumber	1-940
Function	hinged door
Türenmaterial	timber, metal, PVC
Application	exterior door, interior door
Usage	sound protection, smoke protection, fire protection, accessibility

TECHNICAL DATA



Width	17 mm
Height	20 mm
Min. delivery length	250 mm
Max. delivery length	2000 mm
Standard length	750, 900, 1050, 1200 mm
max. travel	16 mm
Actuation	single-sided
Actuator	sliding acutator
removableInner profile	yes
Outerprofile	aluminium
Surface	plate finish
Sealingprofile	silicone, self-extinguishing

FITTING

Fixing	WS - fixing brackets
Espagnolette bolt	yes

EXAMINATIONS AND CERTIFICATES

Sound	yes
Permanent function 1M	yes
Mio Certificate	yes
Leakage rate certificate	yes
Corrision test	yes
Corrision	yes
Barrier free	yes

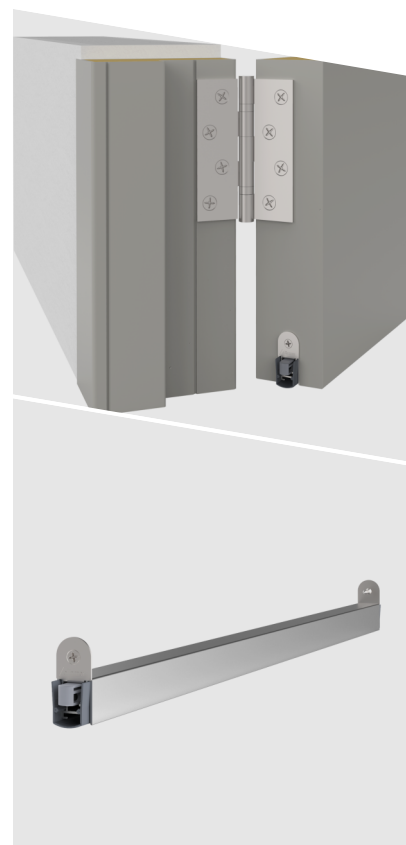

Stadi L-17/20 WS

UL	yes
EPD	yes
Certifire	yes

